


# Miniature Solenoid Valves

## Kuhnke 64 Series Valve - 3/2 Way N/C Manifold Base


### Technical information

<b>Temperature range:</b>	-10°C...+50°C
<b>Valve type:</b>	Poppet
<b>Duty cycle:</b>	Continuous 100%
<b>Housing:</b>	Brass body, encapsulated coils
<b>Seals:</b>	NBR
<b>Lubricant:</b>	Not required.
<b>Earthing contact:</b>	Part of the standard device.
<b>Operating medium:</b>	5 micron filtered, lubricated or non-lubricated compressed air.




### Other information


Insert coil voltage required to complete the order code, example 64.009.24VDC.  
 Standard voltages are 12 and 24 VDC; 24, 110 and 230 VAC.  
 Minimum order quantities may apply.  
 Order connecting plugs separately, see data sheet M1006.  
 Subplates are available for this product, see data sheet M1008.

Symbol	Description	Max. Pressure	Coil Power	Orifice	Ports	Order code
	3/2 way spring return normally closed DC coil	8 bar	DC 4.6 W	1mm	M5	<b>64.009</b>
	3/2 way spring return normally closed AC coil	8 bar	AC 5.5 VA	1mm	M5	<b>64.008</b>
	3/2 way spring return normally closed DC coil	5 bar	DC 4.6 W	1.5mm	M5	<b>64.056</b>
	3/2 way spring return normally closed AC coil	5 bar	AC 5.5 VA	1.5mm	M5	<b>64.055</b>


### Dimensional drawings

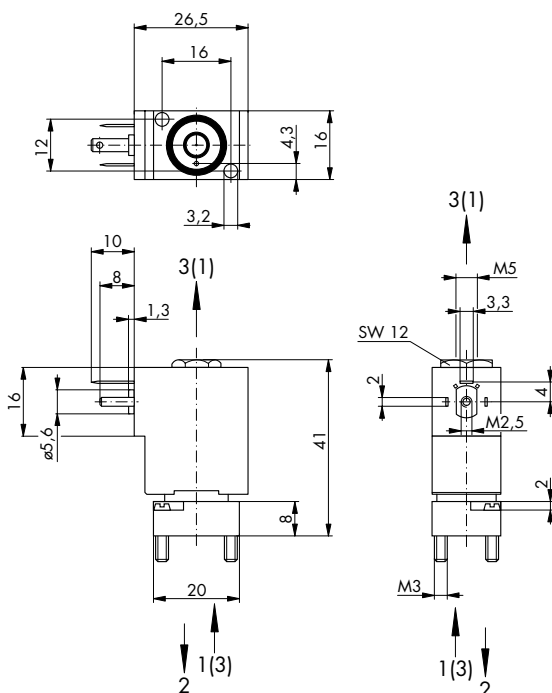

kv=0,70 l/min (NW 1,5)

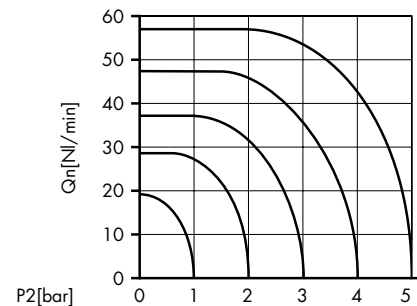

kv=0,45 l/min (NW 1)

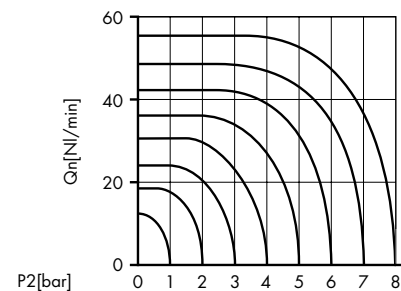

**Impulse Automation Limited**  
**United Kingdom**  
**Company Registration 665193**